


PRODUCT DATASHEET

Edge Panel 60W Loox



Areas of application

- Home
 - Hotels and Catering centers
 - Supermarkets and malls
 - Office and Residential Buildings
-

Product benefits

- Energy savings with high system efficacy: up to 100 lm/W
 - High quality aluminum housing
 - Luminaire designed for easy maintenance
 - Professional optics with wide beam angle of 120°
 - Low maintenance and operation costs due to long lifetime of LED
 - Good color consistency
 - Good color rendering
-

Product features

- Power factor: > 0.5
- Type of protection: IP20,65
- Lifetime(L70): up to 30,000 Hrs
- Color rendering index R_a : > 80




TECHNICAL DATA

Electrical data

Nominal wattage	60W
Nominal voltage	185-265V
Power factor λ	0.5

Photometrical data

Luminous flux	5800 lm
Luminous efficacy	100 lm/W
Color temperature	2700k-4000k-6500k
Color rendering index Ra	80

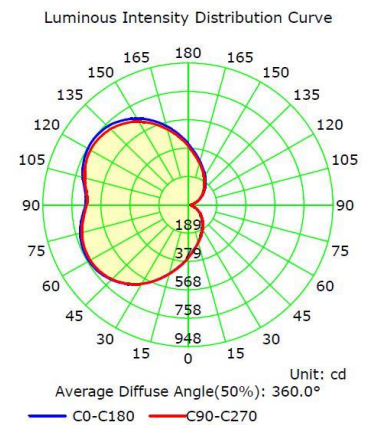

Cut size & Weight

Product weight	1700g
Body size	600*600mm

Materials & Colors

Product color	White
Body material	PP

Application & Mounting

Ambient temperature range	-30...+50 °C
Type of protection	IP20

Dimmable	No
Mounting location	Pendant
Application environment	Indoor

Lifespan

Lifespan L70/B50 at 25 °C	30000 hrs
Number of switching cycles	30000

DISCLAIMER

Subject to change without notice. Errors and omission excepted. Always make sure to use the most recent release.