

PRODUCT DATASHEET

Surface Panel 40w Sana2 Loox



Areas of application

- Home
 - Hotels and Catering centers
 - Supermarkets and malls
 - Office and Residential Buildings
-

Product benefits

- Energy savings with high system efficacy: up to 86 lm/W
 - High quality aluminum housing
 - Luminaire designed for easy maintenance
 - Professional optics with wide beam angle of 180°
 - Low maintenance and operation costs due to long lifetime of LED
 - Good color consistency
 - Good color rendering
-

Product features

- Power factor: > 0.5
- Type of protection: IP20
- Lifetime(L70): up to 25,000 Hrs
- Color rendering index R_a : > 80




TECHNICAL DATA

Electrical data

Nominal wattage	40W
Nominal voltage	180-240V
Power factor λ	0.5

Photometrical data

Luminous flux	3100 lm
Luminous efficacy	86 lm/W
Color temperature	2700k-4000k-6500k
Color rendering index Ra	80

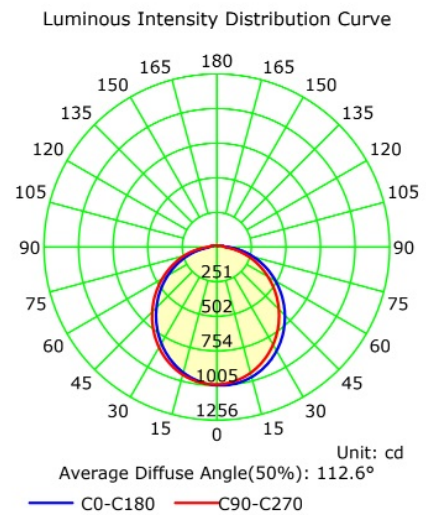

Cut size & Weight

Product weight	320g
Body size	225*44mm

Materials & Colors

Product color	White
Body material	PP

Application & Mounting

Ambient temperature range	-30...+50 °C
Type of protection	IP20

Dimmable	No
Mounting location	Pendant
Application environment	Indoor

Lifespan

Lifespan	25000 hrs
waranty	3years

DISCLAIMER

Subject to change without notice. Errors and omission excepted. Always make sure to use the most recent release.